

Winkeloberlichtbeschlag PT 41


mit einseitiger Aussteifungslasche

Art. Nr. 03.162 links (wie Abbildung)

Art. Nr. 03.163 rechts

inkl. Einsatz (Art. Nr. 03.125)

mit Zapfen Ø15 mm




Art. Nr. 01.900 extra Zwischenlage

8 mm Glasdicke

Art. Nr. 01.901 extra Zwischenlage

12 mm Glasdicke


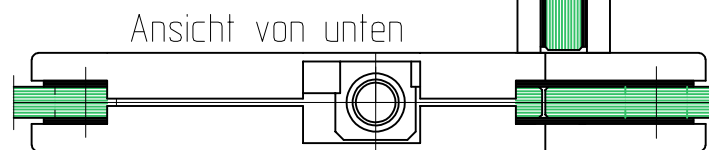


Art. Nr. 03.262

inkl. Anslageinsatz, links

Art. Nr. 03.263

inkl. Anslageinsatz, rechts

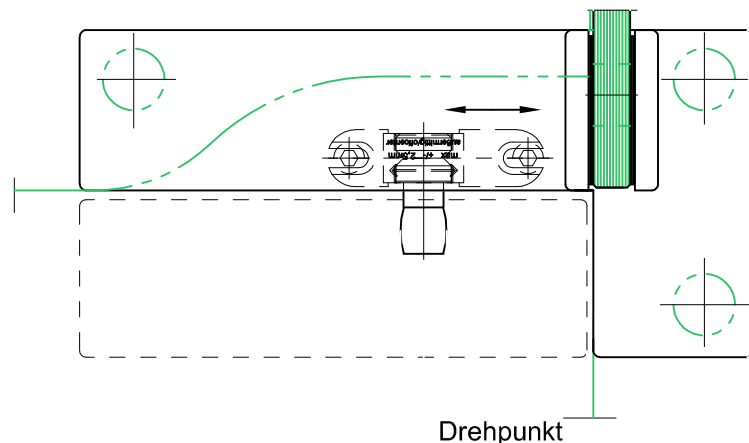

auch mit beidseitiger
Aussteifung lieferbar
siehe Detail 03-068

Glasbearbeitung siehe Detail 03-071

Technical drawing of a mechanical part. The drawing shows a side view with a base of 10 units. The total width is 45 units. The height of the base is 30 units. The top surface is a horizontal line. The right side features a vertical edge with a fillet of radius R10. The distance from the center of the base to the start of the fillet is 30 units. The distance from the center of the base to the center of the circular feature is 45 units. The circular feature has a diameter of 20 units and is positioned 30 units above the base. The total height of the part is 60 units. A section line is shown on the right side, indicating a cross-section.

